

Machine - Auxiliary - Tool - Material

Edge Band Machine KN-700-3




Intelligent · Fully Automatic · Precise



TOP Gluing Pot

Inner Teflon layer, suitable
for PUR, EVA glue


III

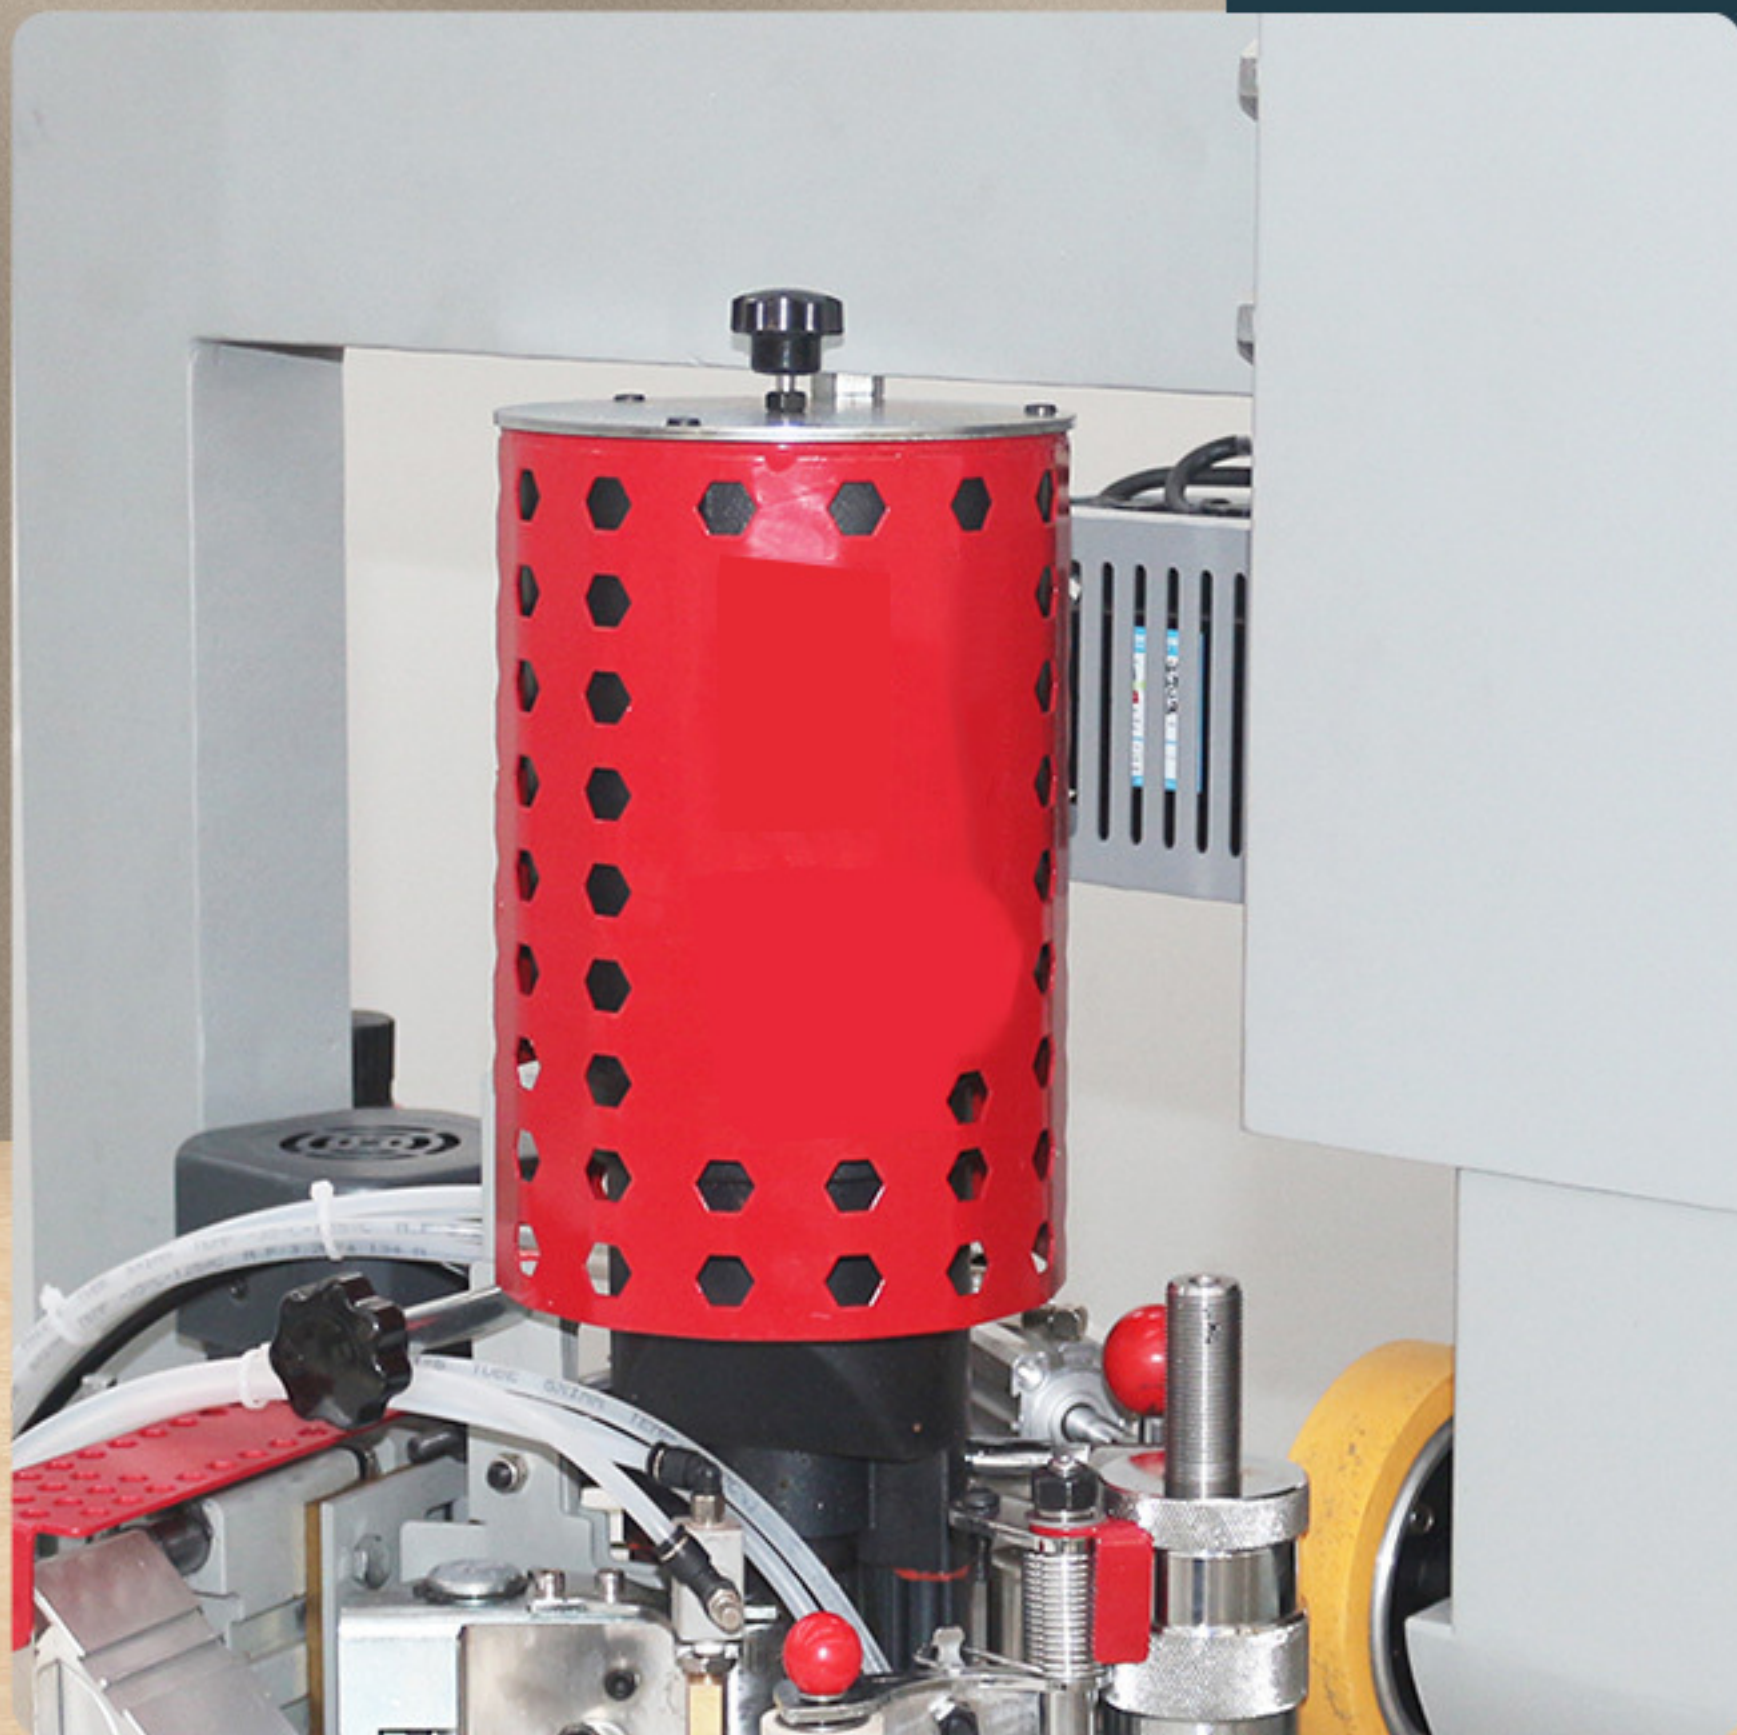

Assisted Automatic Feeding





III

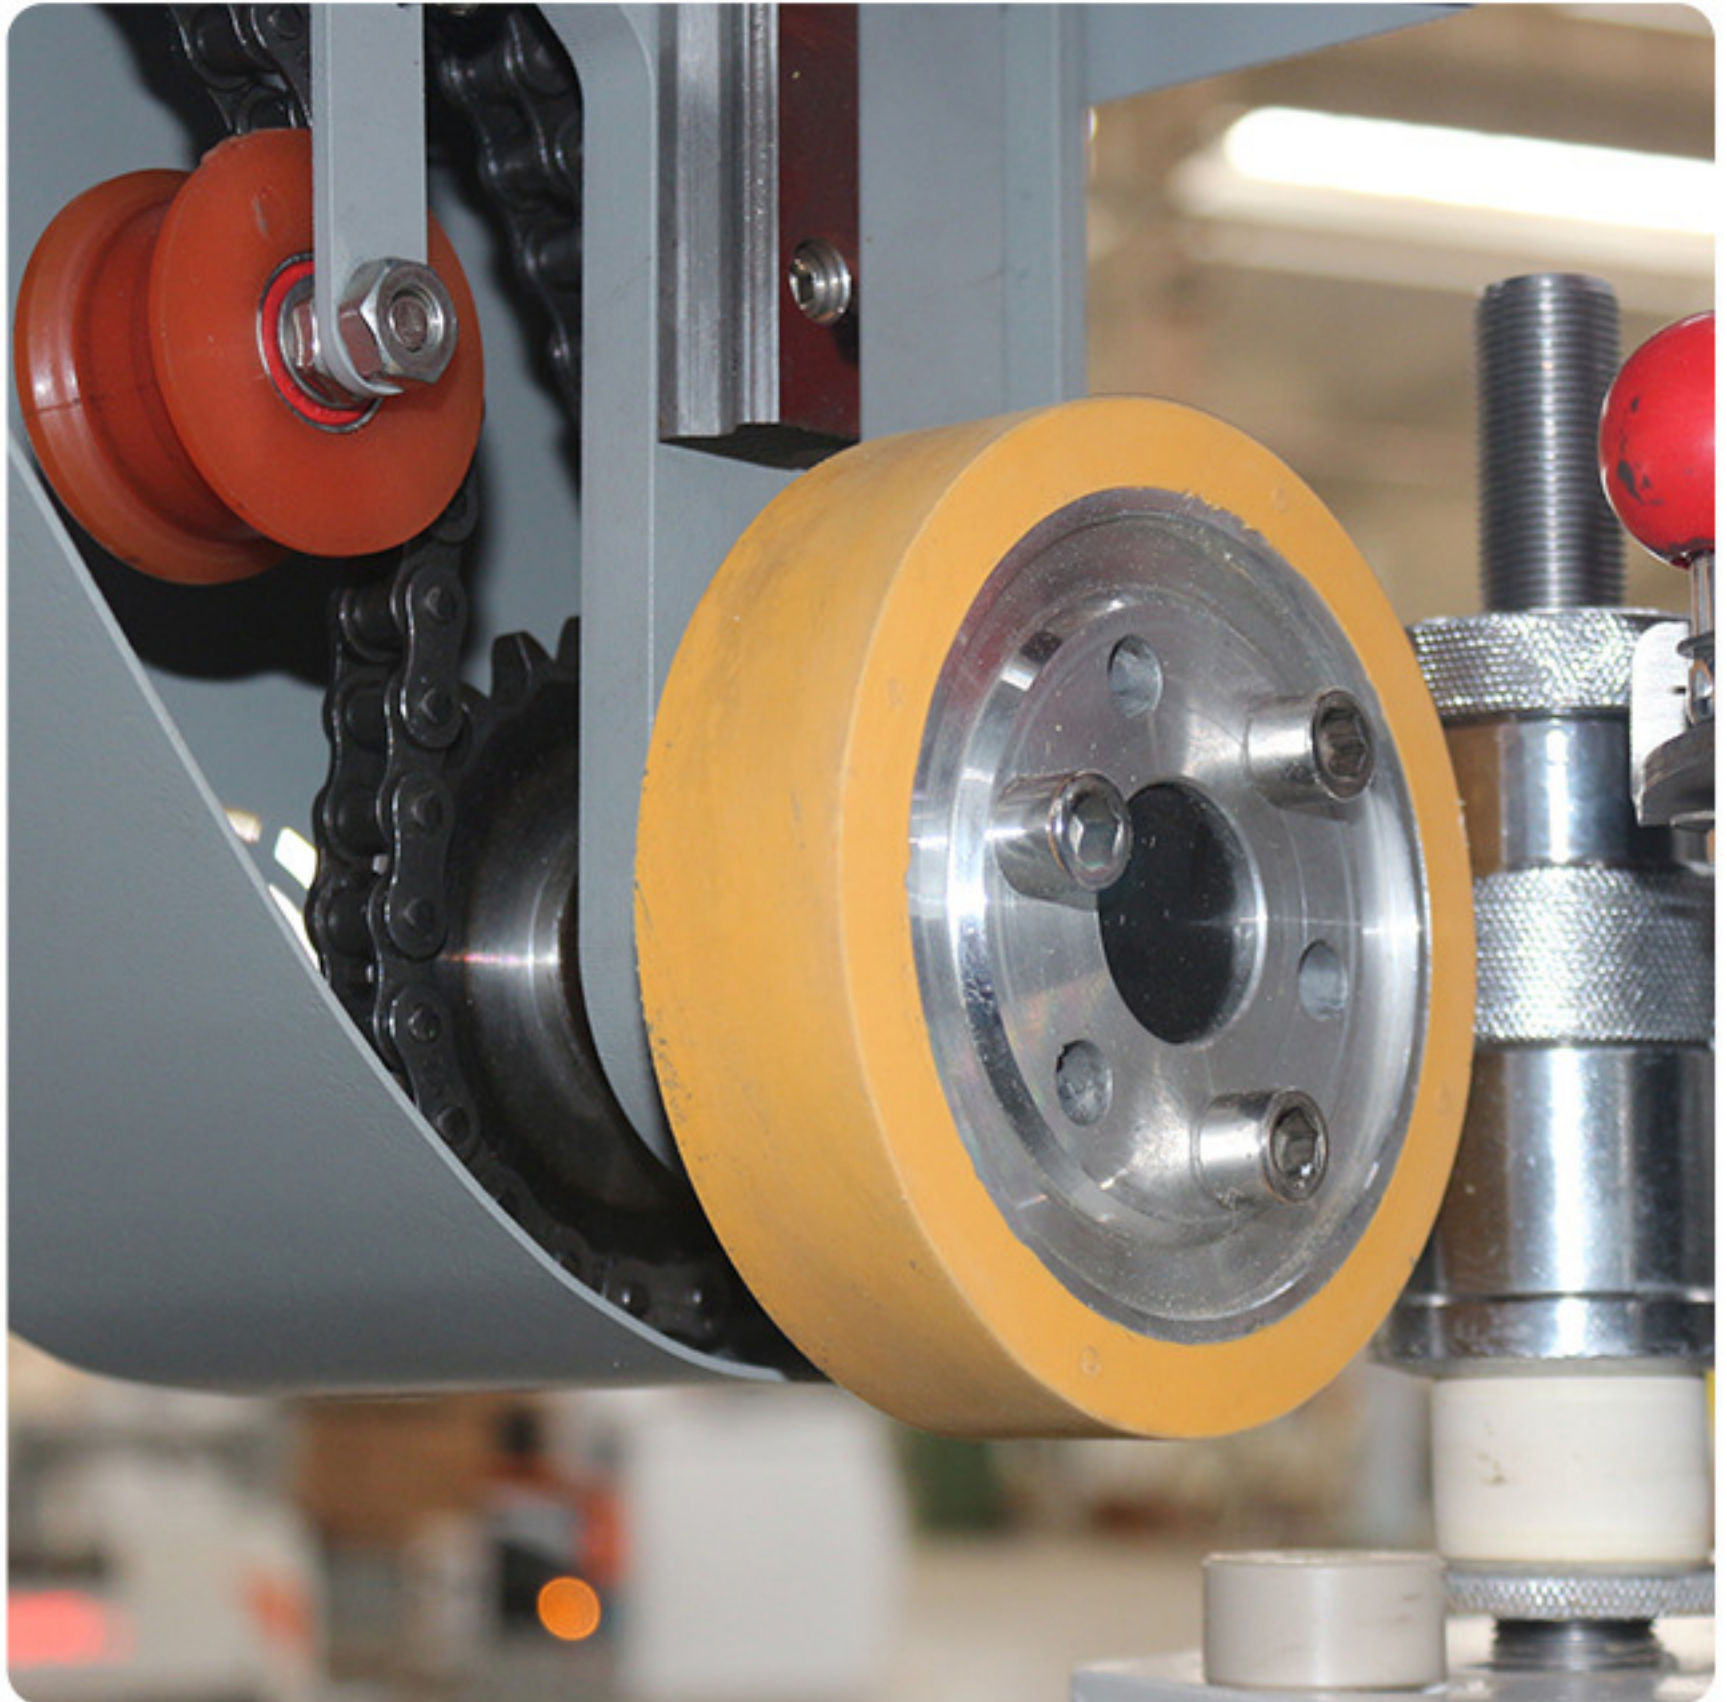

Edge Interface

KN-700-3 adopts laser distance measurement, the docking error is $\pm 0.3\text{mm}$


III

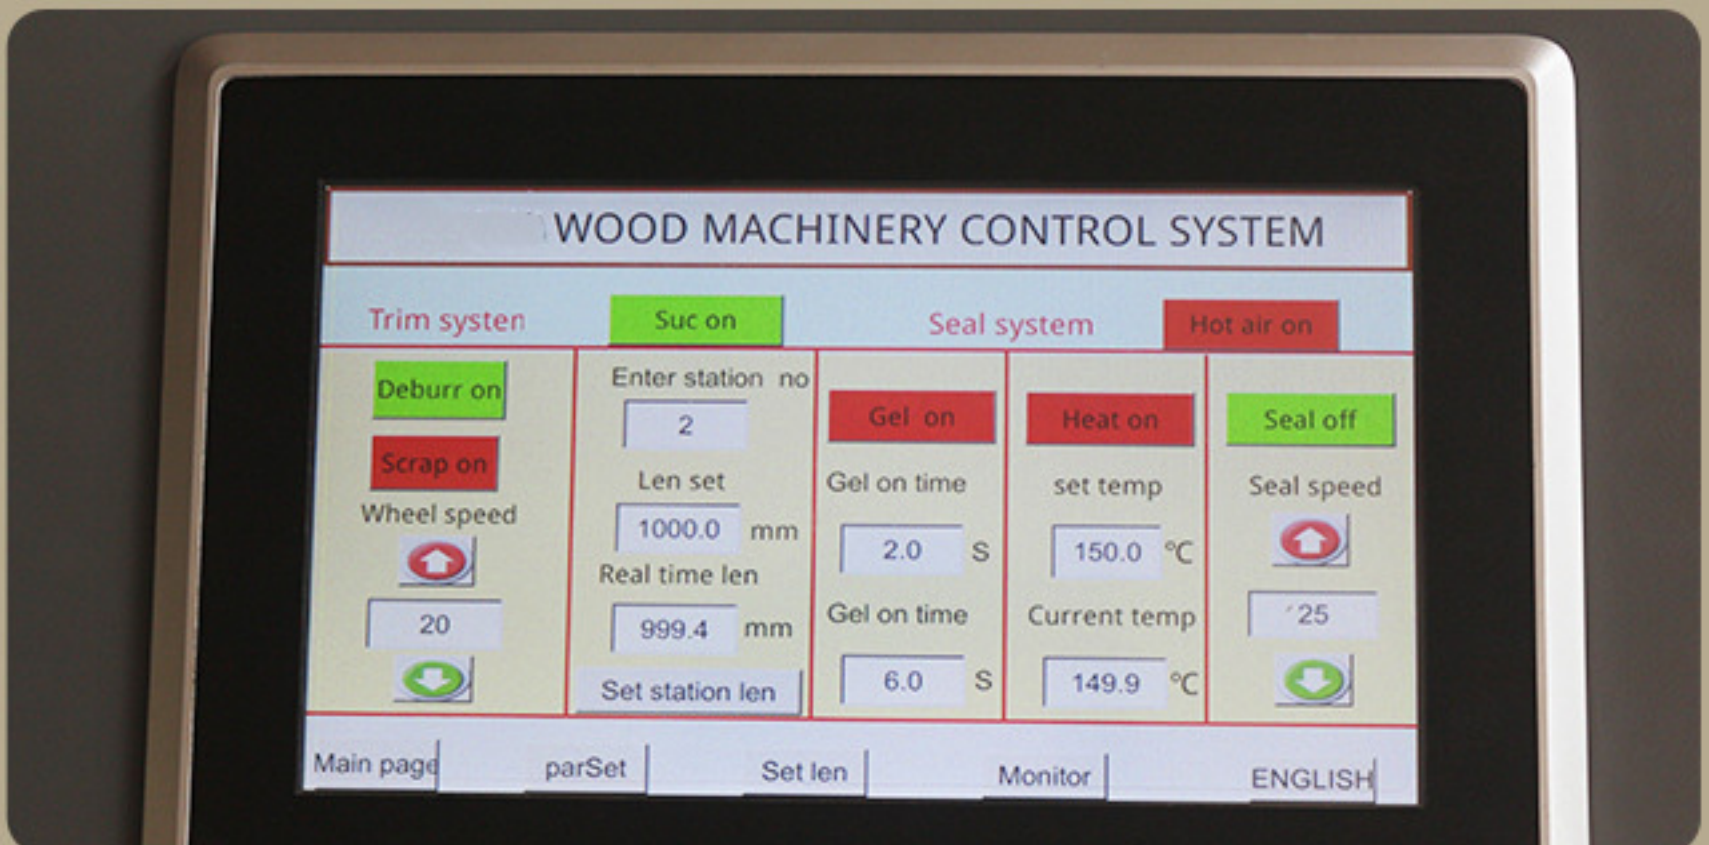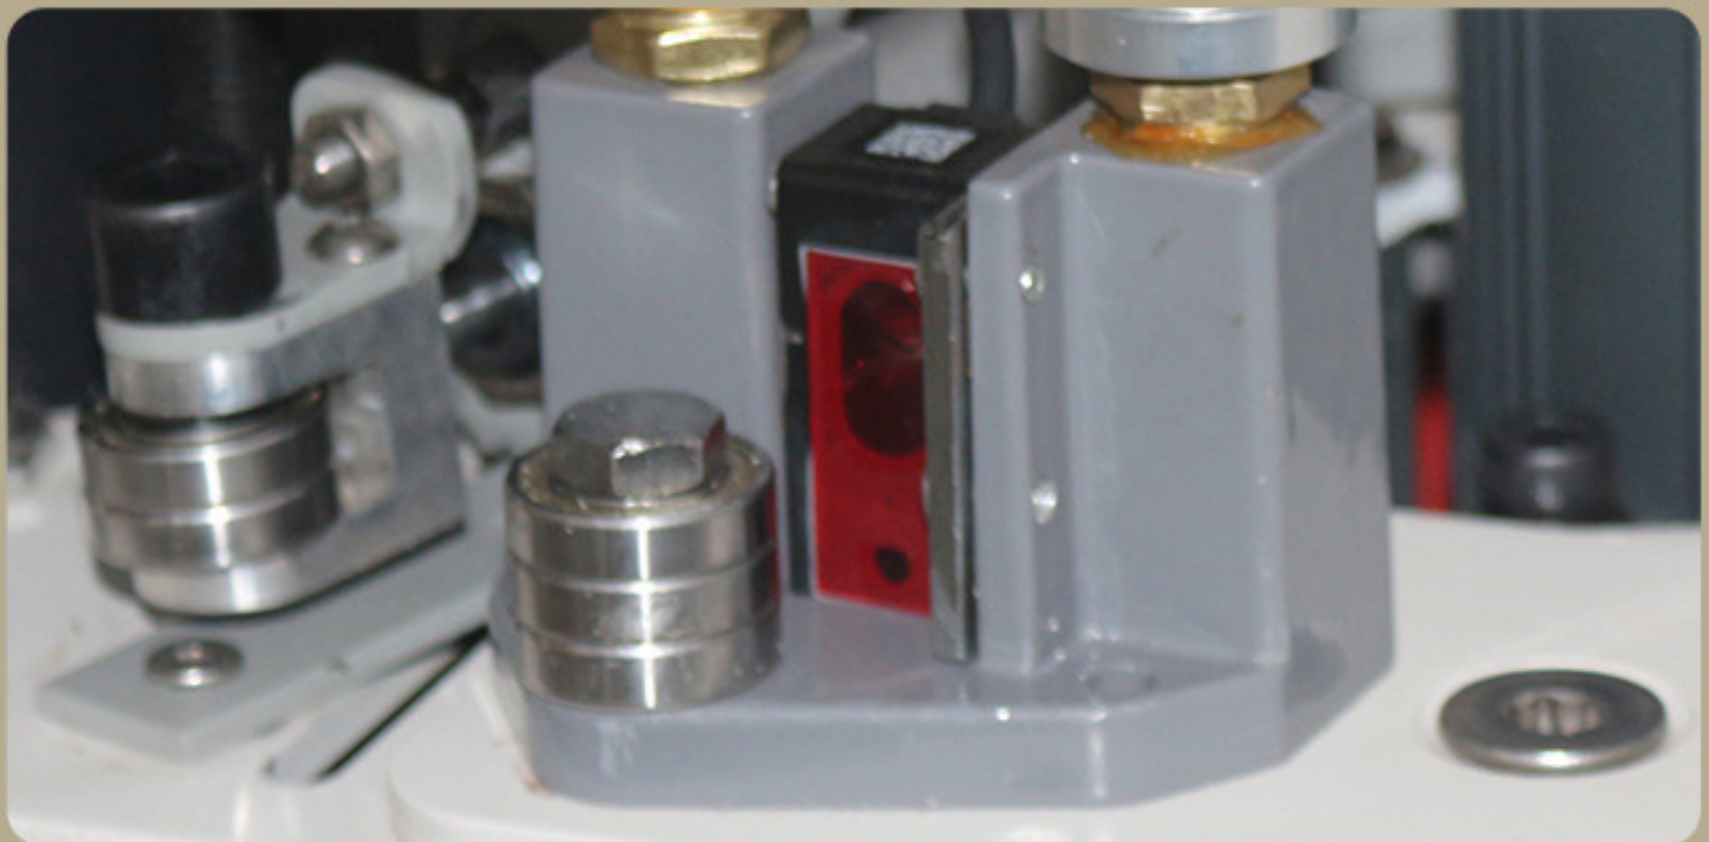

Equipped with secondary
auxiliary fit wheels

The edge banding strip and the plate
are more firmly pasted after two times of pressing

III

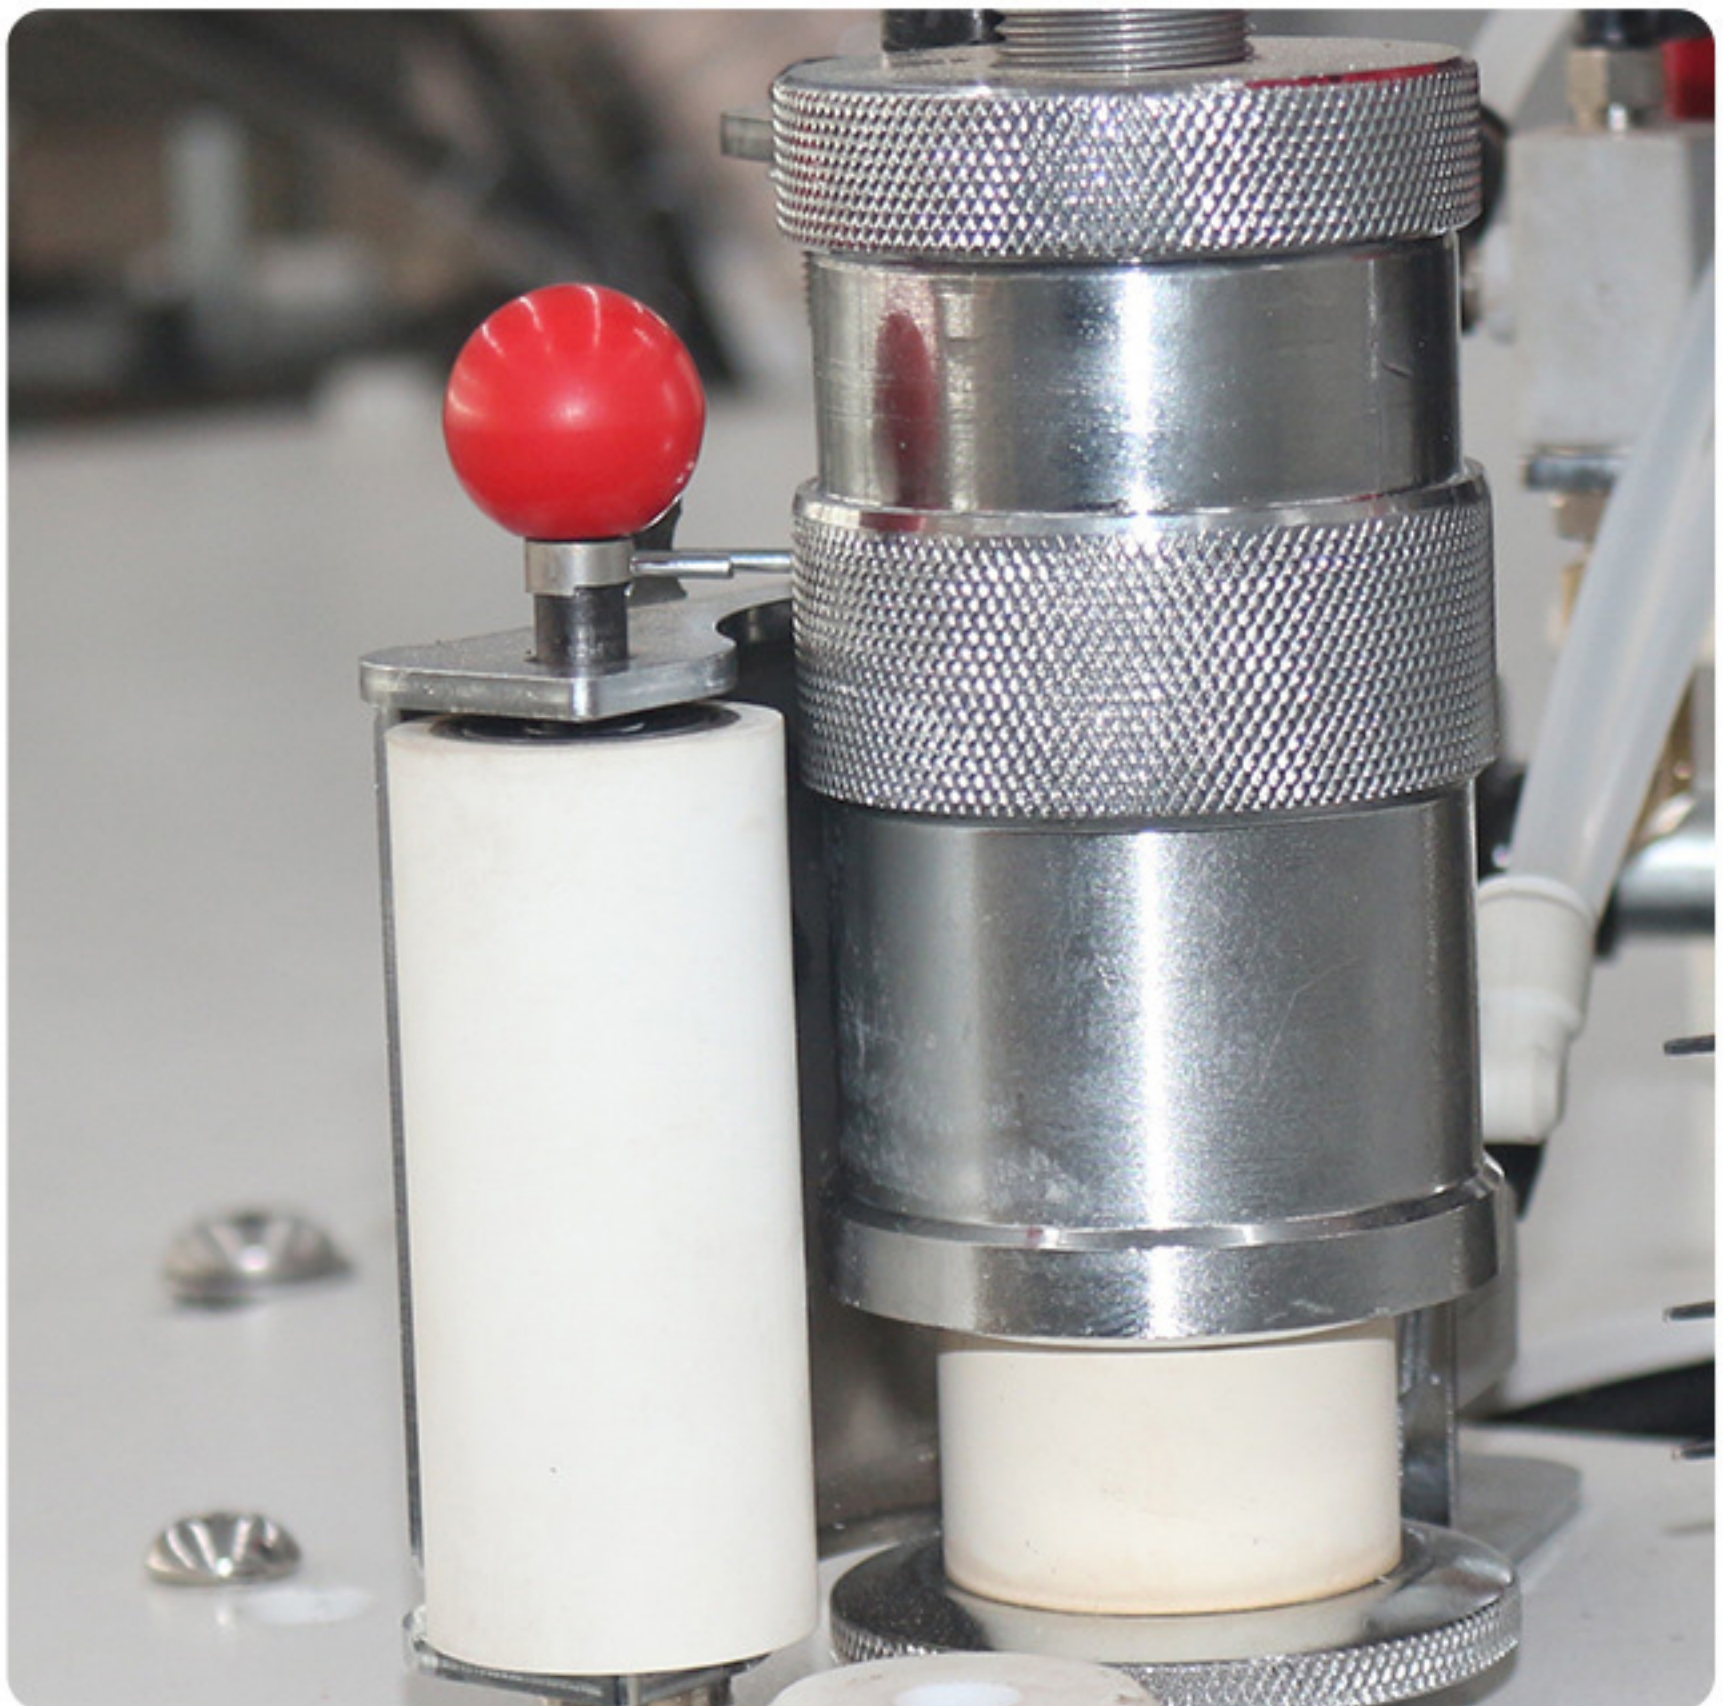


New anti-backward belt conveyor


Added U-shaped groove limit to prevent the edge banding from rebounding and moving up and down, and the belt feeding is smooth


|||





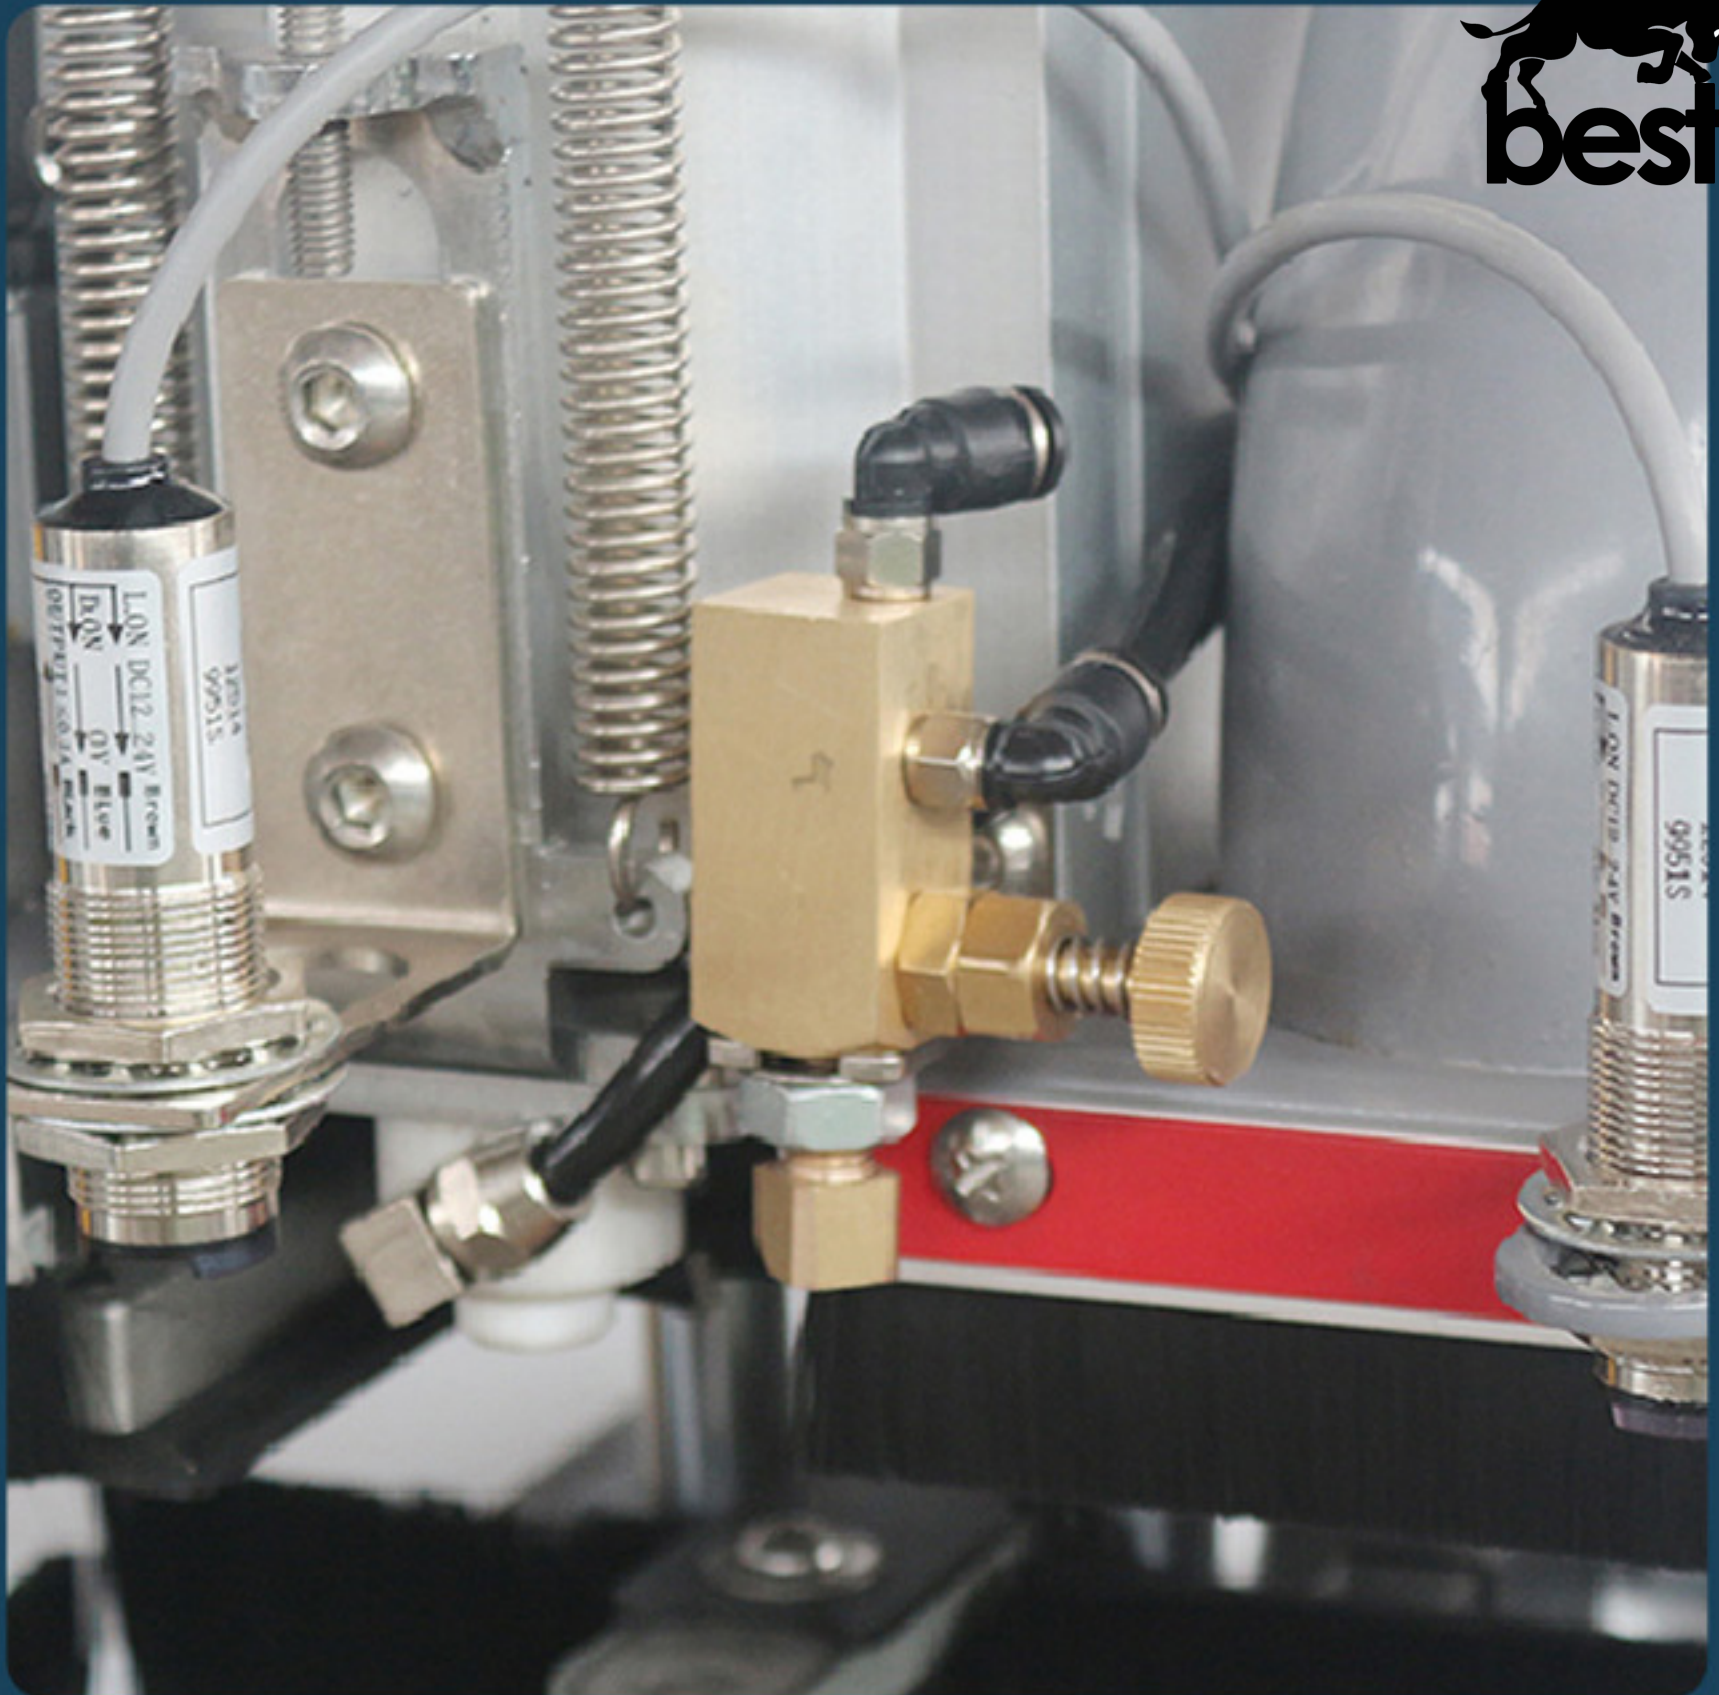

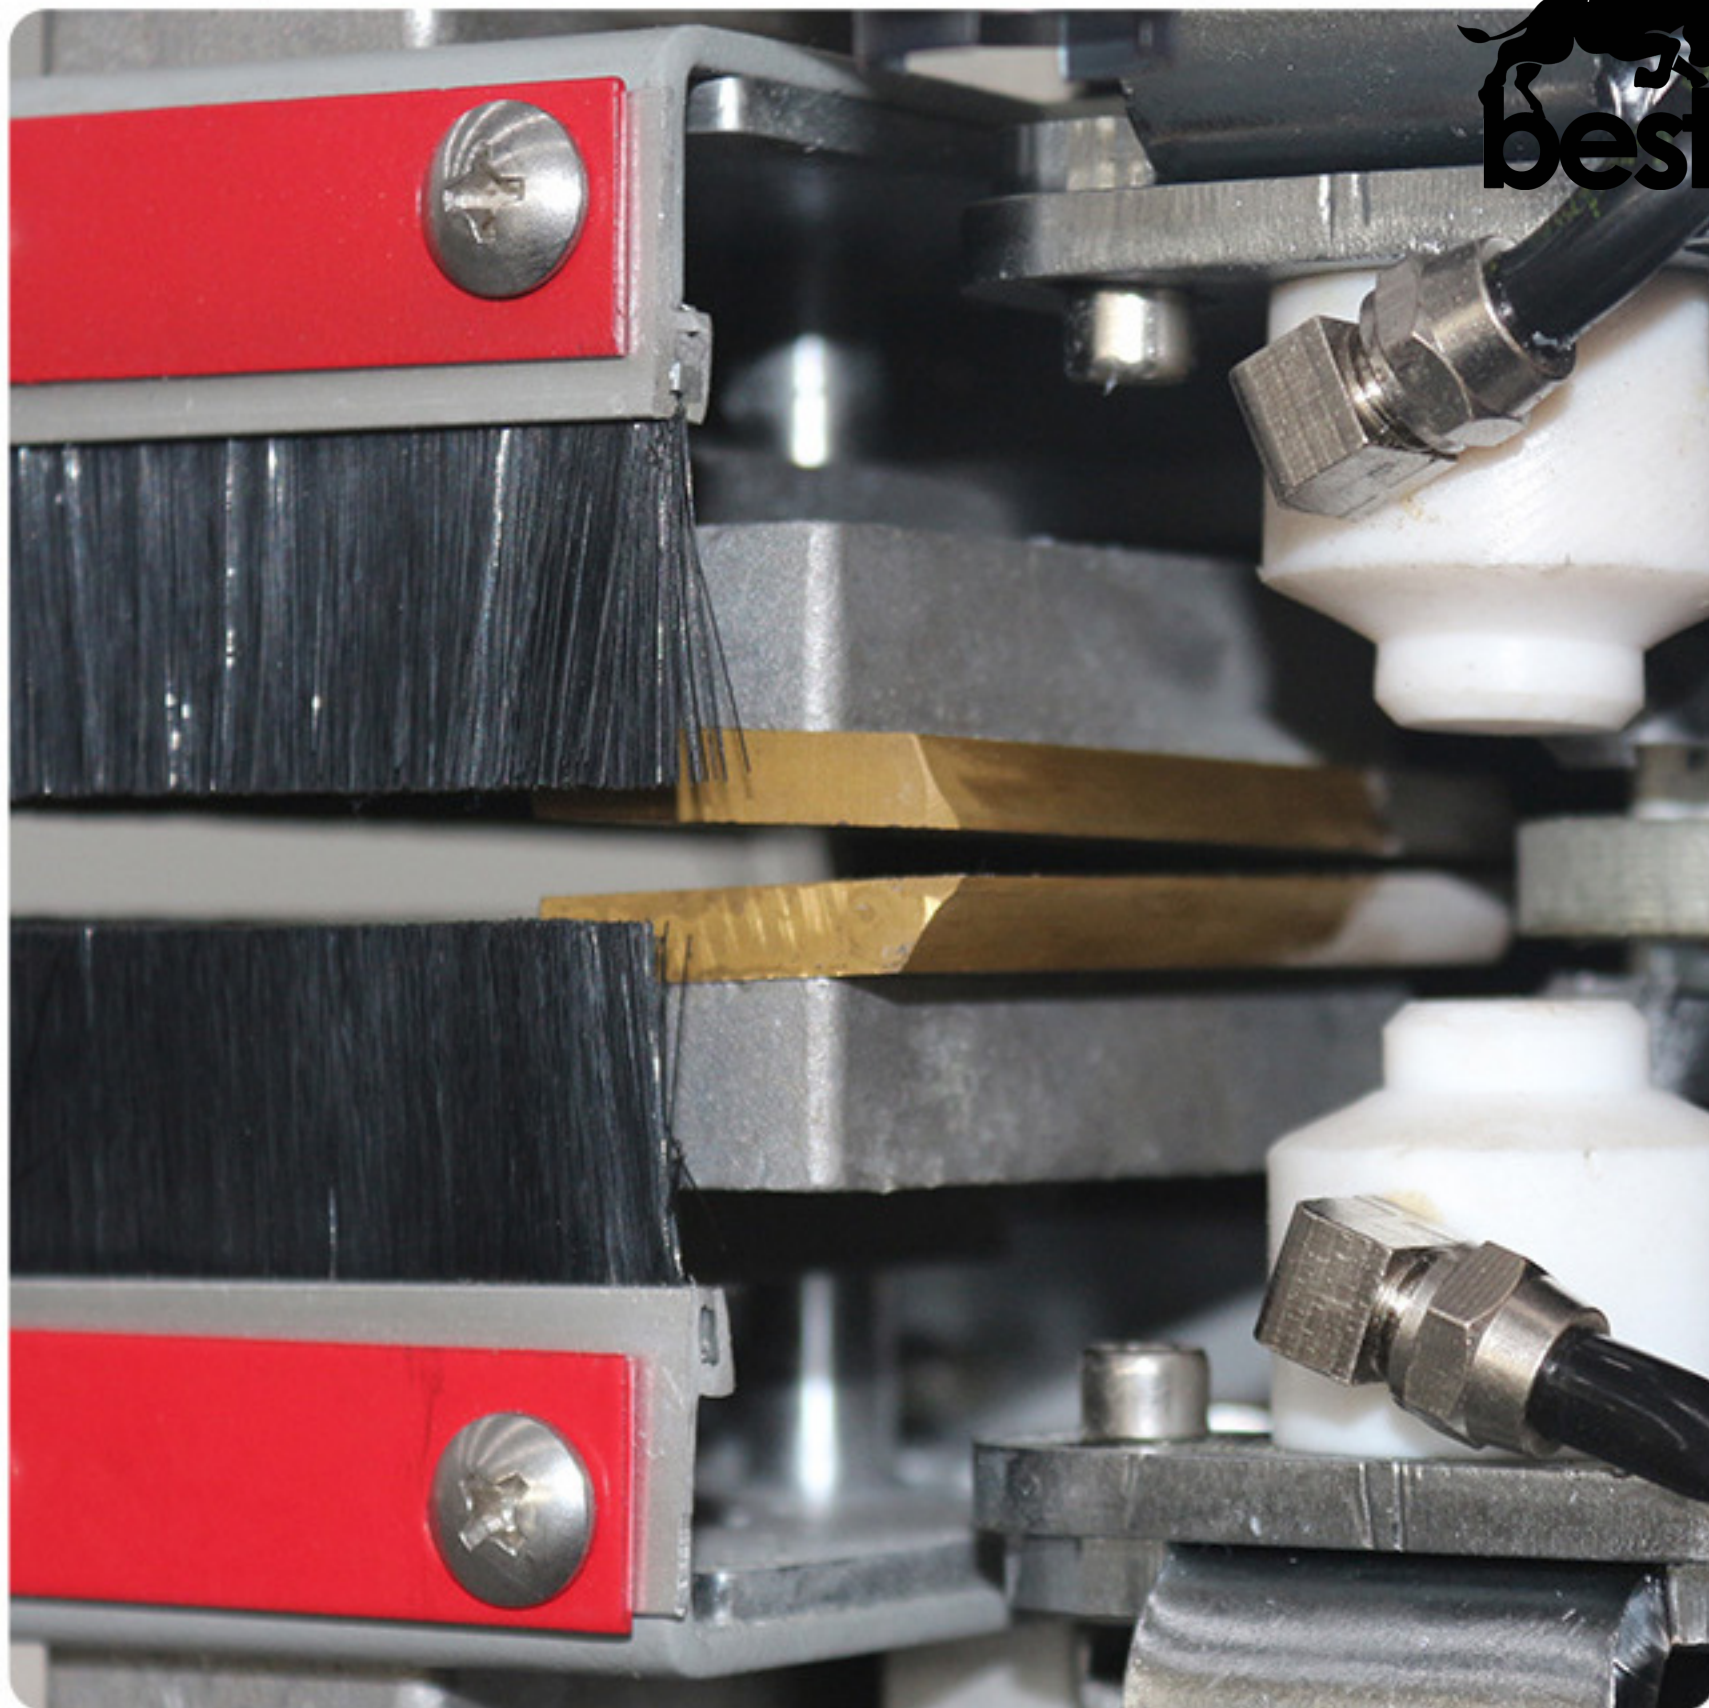

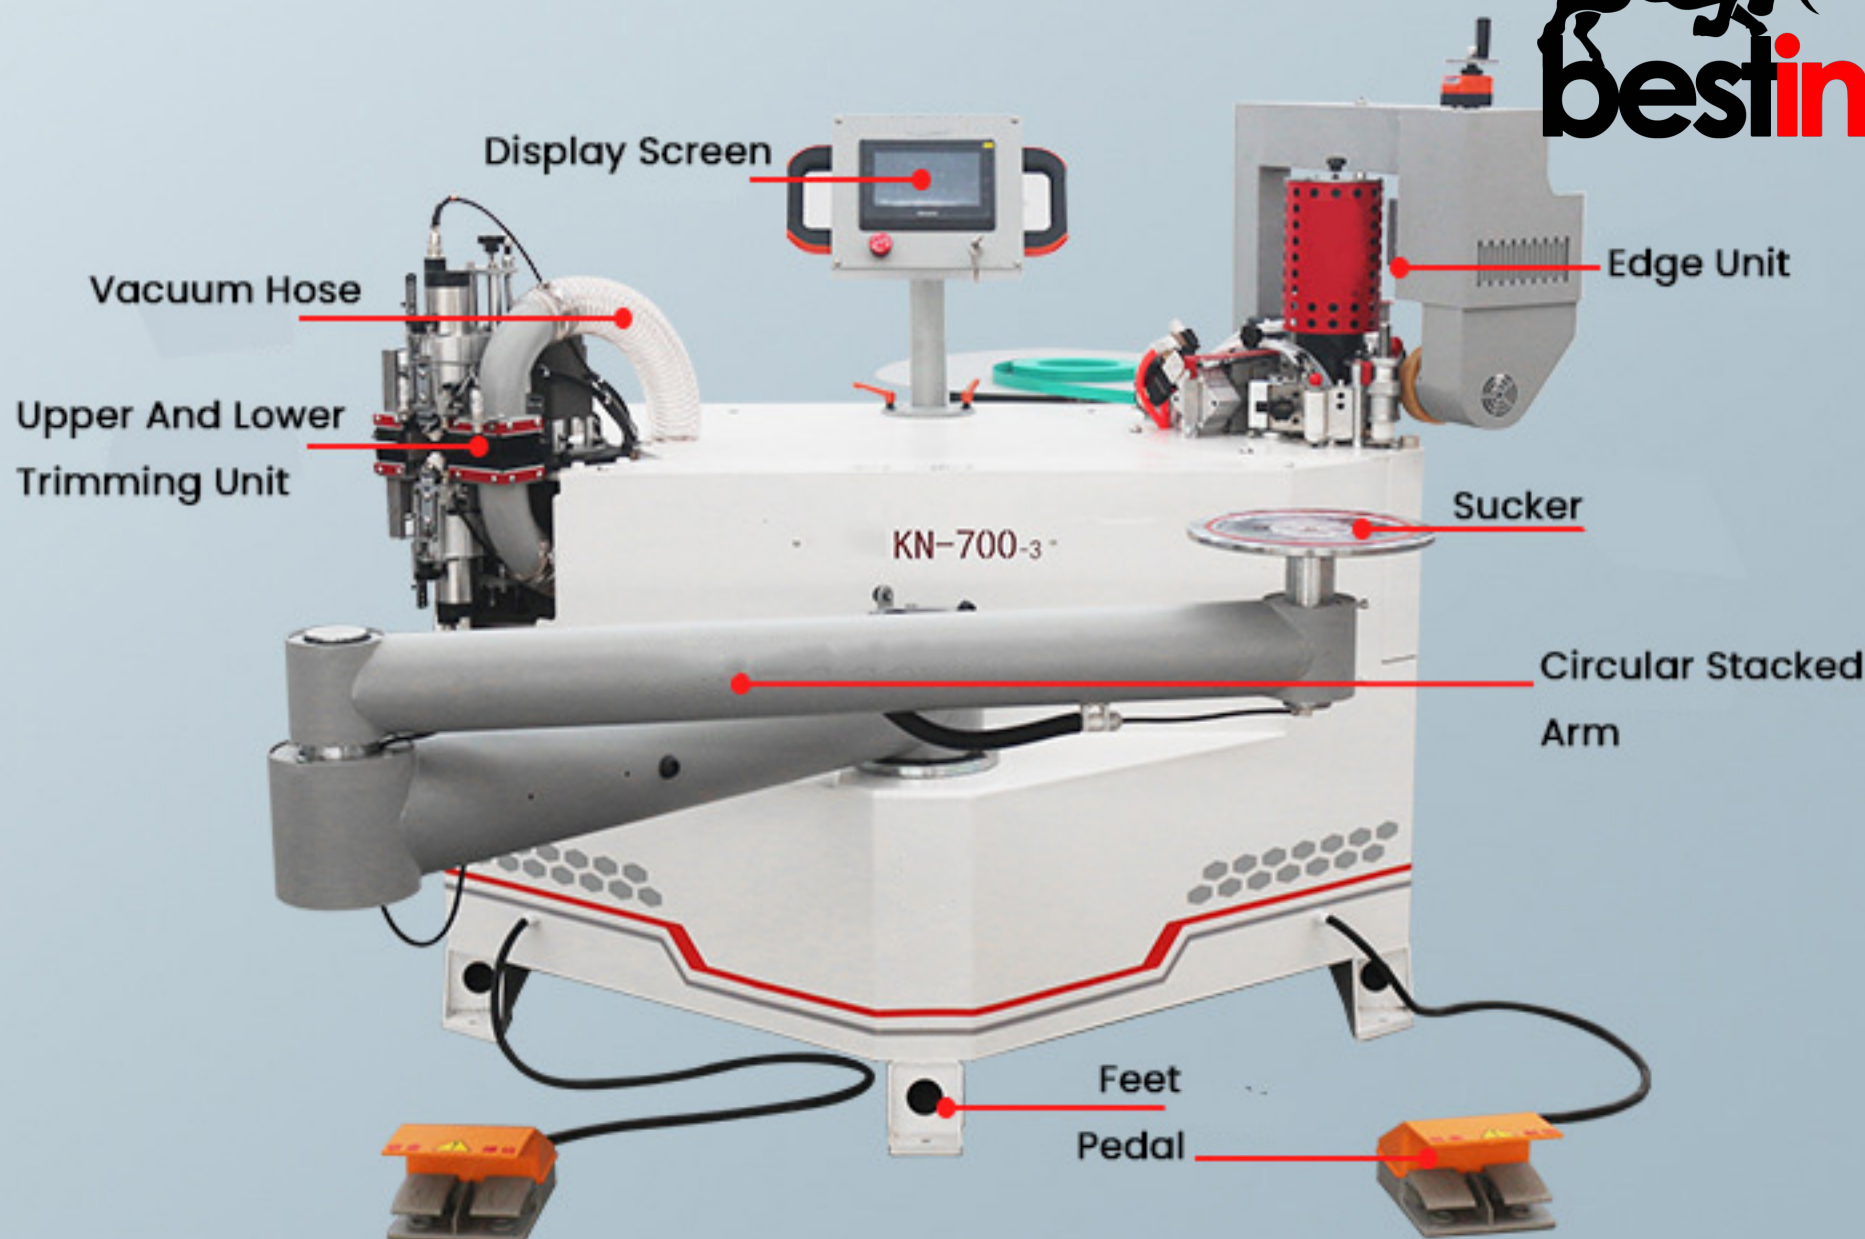

KN-700-3

KN-700-3 Curve Edge Banding Machine

Voltage: 380V/50Hz/3Phase	Total Power: 6.5kW
Air Pressure: 0.6-0.8Mpa	Glue Pot Capacity: 2600ml
Glue Pot Temperature: 110-210°C	Type of Hot Melt Adhesives: EVA/PUR
Head Rotation Angle: 15°	Edge Strip Width: 14-70mm
Edge Strip Thickness: 0.5-3mm	
Boards Thickness for Trimming: <14mm single-sided trimming; 14-70mm double-sided trimming	
Inner Arc Radius: ≥20mm	Banding Speed: 0-30cm/s
Trimming Speed: 0-24cm/s	Gas Tank Volume: 2L
Diameter of External Dust Collector: 150mm	
Applicable Edge Strip Material: PVC/Plastic/Melamine/Veneer(need to be customized)	
Packing Dimension: 1870*1400*1530(L*W*H mm)	
Packing Weight: 530kg	





Your Trusted Partner for Woodworking Machine



BESTIN

Phone: +86 166 7861 1290

Email: info@bestingroup.com

Web: www.bestingroup.com

Add: Jinding Plaza, No. 83 Haier Road, Laoshan, Qingdao, China, 266000